


Dimensions en mm



Caractéristiques :

- Béton selon usine

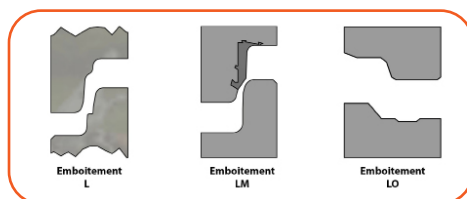

Usine de fabrication	HAUTEUR UTILE H (mm)	DN DES VOILES À BRISER	NOMBRE D'OPERCULES	POIDS (kg)	NOMBRE D'ANCRES	DÉMOULAGE	BÉTON	EMBOÎTEMENT	Réf. article
Chenon (16)	600	235, 290, 385, 490	4	615	3 x 1,3T	Immédiat	XS3	L	FAB00782
Champagné (72)	610	250, 420, 520	4	620	sans	Différé	XC3	LM	FAB02027
	970	250, 420, 520	2 à 180°	985	sans	Différé	XC3	LM	FAB01862
250, 420, 500, 650, 800		2 à 180°							
Luçon (85)	1000	240, 415, 500, 640, 815	2 à 180°	1100	3 x 1,3T	Différé	XS3	L	FAB02487
		240, 415, 500	2 à 180°						
Portet (31)	750	DN opercules 420, 525, 636, 650	4	920	3 x 2,5T (ancres à l'extérieur)	Immédiat	XA3	LO	FAB01259
	900	Forme hexagonale DN Opercules 450, 550, 680, 780	2 x 680 2 x 780	1330		Immédiat	XA3	LO	FAB01260

FT 090 version du 22/05/2024